

ACCESSORIES

A complete range of accessories



Return pulley and polyester strap

■ Opening return pulley

- The valve mechanism allows an easy cable insertion
- Rotating high-resistance hook
- With latch hook
- Only for steel cable



Return pulley with valve	80 kN POU00015	140 kN POU00016
Ø pulley (mm)	140	140
Ø cable (mm)	12	14
Weight (kg)	6,5	8,5

■ Aluminium return pulley

- Suitable for steel cables and polyester straps
- Rotating lock
- With ball bearing
- Lightness from aluminium
- Rotating flange

Aluminium return pulley	110 kN POU00055	150 kN POU00056	170 kN POU00057
Ø and width of pulley (mm)	158-35	198-42	198-42
Ø cable (mm)	14	16	16
Weight (kg)	2,4	3,9	5,1



■ Polyester strap


- Reinforced curls ends according to EN 1492-1
- Low friction
- No swelling in high humidity
- Polyester doubled for maximum strength

Polyester strip with 2 curve ends			
	Color code	Width	Length
SAN00010	Green	60 mm	3 m
SAN00011	Yellow	90 mm	3 m
SAN00012	Grey	120 mm	3 m

indications of resistance by the number of stripes and by the colour



Break point coef.7	Colour code	100%	80%	200%
14 000 kg	Green	2000 kg	1600 kg	4000 kg
21 000 kg	Yellow	3000 kg	2400 kg	6000 kg
28 000 kg	Grey	4000 kg	3200 kg	8000 kg


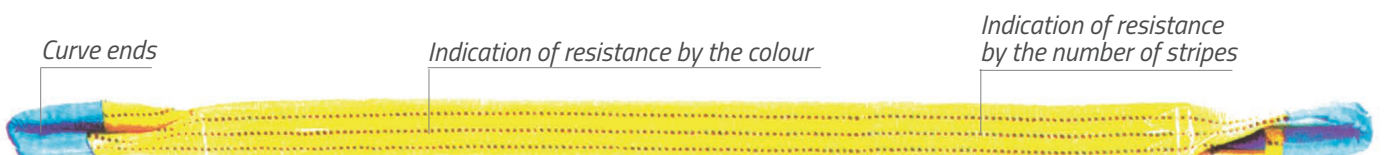


■ Mobile pulley TAJFUN PS 130

- Large loading capacity
- Low weight and small size compared to other pulleys on market
- « SMART » locking allows quick and easy opening of lateral face of pulley
- High quality materials
- 3 meters long lanyard

Stowage lanyard

Specifically adapted to work comfortably with TAJFUN PS 130 mobile pulley and forest winches.



Mobile pulley, 2.55 kg with 3 m stowage lanyard (POU00054)

Max. loading capacity (kN) 130

Break point (kN) 260



Hook

■ **Chain rope connector**
Red cat.8



Ref	w mm	For chain	angle	Weight kg	Traction daN
CRO00021	20	8 mm	45°	0,65	4500
CRO00022	20	10 mm	45°	0,90	6500

■ **Blue cat. 10**




Ref	Dimensions mm		For chain	Weight kg	Traction daN
	w	l			
CRO00023	20	145	8 mm	0,61	6000
CRO00024	36	207,5	10 mm	1,38	8500

■ **Rotating chain rope connector**
Red cat.8 / Blue cat.10



Ref	w mm	For chain	angle	Weight kg	Traction daN
CRO00020	20	8 mm	45°	0,68	4500
CRO00019	20	8 mm	45°	0,68	6500

■ **Sliding hook**
Cat. 8



Ref	Cable Ømax	Dimensions d	g	g1 min	Weight kg	Traction daN
CRO00003	20	16 mm	25	17	0,69	3000
CRO00006	20	22 mm	26	17	0,97	5000

■ **Hitting hook**



Ref	Weight kg	Traction daN
CRO000100	0,65	4000

■ **Blocking sleeve**

- For winch cable Ø 9 to 14 mm



Blocking sleeve + corners Ø 9/11 mm (DOU00003B+C)

Blocking sleeve + corners Ø 12/14 mm (DOU00003)

■ **Choker**

- For winch cable




Choker for winch cable Ø10/14 mm (CHO00007)

High quality

steel cable HTP

- High strength
- Available diameters : 9, 10, 11, 12, 13, 14, 16 and 18 mm
- Standard assembly :
1x loop + Sliding hook



Steel cable HTP (mm)	Ø 9	Ø10	Ø11	Ø 12	Ø 13	Ø 14	Ø 16	Ø 18
Break point (kN)	92,05	111,47	133,28	152,79	180	210	239	297
Ref	CAB09R	CAB10R	CAB11R	CAB12R	CAB13R	CAB14R	CAB16R	CAB18R
Weight per meter (kg)	0,453	0,543	0,655	0,764	0,881	1,01	1,29	1,59
1x loop + Sliding hook								

Red skidding chain cat. 8

- Chain with hook and needle



Round skidding chain / red cat. 8 + hook + needle (galvanised)

Ø8 mm, Lg 2,5 m (Traction : 40 kN / Break: 80 kN) (CHA00017)

Ø10 mm, Lg 2,5 m (Traction 63 kN / Break : 126 kN) (CHA00018)

Square skidding chain / red cat. 8 + hook + needle (painted)

Ø8 mm, Lg 2,5 m (Traction : 45 kN / Break: 90 kN) (CHA00019)

Ø10 mm, Lg 2,5 m (Traction : 63 kN / Break : 126 kN) (CHA00020)

Blue skidding chain cat. 10

- Chain with hook and needle



Round skidding chain / blue cat. 10 + hook + needle (galvanised)

Ø8 mm, Lg 2,5 m (Traction : 50 kN / Break : 100 kN) (CHA00047)


Ø10 mm, Lg 2,5 m (Traction : 80 kN / Break : 160 kN) (CHA00048)

Round skidding chain / blue cat. 10 + hook + needle (painted)

Ø8 mm, Lg 2,5 m (Traction: 60 kN / Break : 120 kN) (CHA00037)

Ø10 mm, Lg 2,5 m (Traction : 85 kN / Break : 170 kN) (CHA00050)


Hook for skidding chain



Red : Cat. 8 / Blue : Cat. 10

Ref	For chain	D	Dimensions (mm)	S	Weight kg	Traction daN
CRO00013	8 mm	10,0	59,0	10	0,38	6000
CRO00014	10 mm	12,5	80,8	12	0,76	8500
CRO00015	8 mm	10,0	59,0	10	0,38	6000
CRO00016	10 mm	12,5	80,8	12	0,76	8500

Parallel hook with eyelet



Ref	For chain	Dimensions (mm)						Weight kg	Traction daN
		A	D	O	R	G	H		
CRO00017	8	10	10	16	60	30	24	0,23	4000
CRO00018	10	13	11	21	80	44	31	0,59	6300

Moss remover and wood storing

■ Small moss remover

- Fixed on a small tractor back, to remove moss and roots from grass surface
- 2 rows of 10 shifted peaks for scarification on a 1m width
- Central part dimension : 1000 x 235 mm
- Ballasting weight : min. 30 kg recommended



Small moss remover

Small moss remover 1000 x 235 mm (EM0000100)

■ Large moss remover

- Fixed on a tractor back, to remove moss and roots from grass surface
- 4 rows of 20 shifted peaks for scarification on a 2 m width
- Central part dimension: 2000 x 590 mm
- Ballasting weight : min. 30 kg recommended



Large moss remover

Large moss remover 2000 x 590 mm (EM0000200)

■ Plastic frame for wood filling

- Exists in 40 and 60 L
- Maximum wood length 30 cm



Frame 40 L for wood	(CAD000040)
Frame 60 L for wood	(CAD000060)
Bag 40 l, 50 x 85 cm with locking	(FIL000141)
Bag 60 l, 60 x 85 cm with locking	(FIL000160)

■ Steel articulated frame for wood storage

- Accessory : net



Steel articulated frame for net of 1000 L (CAD0010000)

Net 1000 L capacity 194 x 140 cm, for euro pallet with UV protection (BIG001000)

■ OCHSENKOPF sappie

- Ergonomic use
- High durability



Sappie OX 173 E-0500 (SAP000001)
Length : 380 mm, weight : 0,7 kg

Sappie OX 173 H-0580 (SAP000002)
Length: 800 mm, weight : 1,1 kg

■ OCHSENKOPF Slaughter lever

- Powerful, effective and ergonomic
- Forged steel
- Comfortable and non-skid cork handle
- Adjustable hook



Slaughter OX 58-0800 (LEV000001)
Length : 800 mm, weight : 2,8 kg

Slaughter OX 58-1200 (LEV000002)
Length : 1.300 mm, weight : 3,6 kg

Safety rules :

- One user at a time
- Maximum load 150 kg at the handle
- In case of damage, the product must be replaced

■ Chainsaw support

- Reversible for right or left-handed
- Adaptable to all chainsaw models
- With wood blocking by lug and claw handle



Chainsaw support compatible with all models (CHE000100)

■ Jack for front wheels mover

- Maximum diameter 400mm
- Adjustable width
- Lifting capacity : 250 kg maximum



Jack for front wheels mover
Length : 380 mm,
Weight : 0,775kg (CRI000100)

■ Log trolley

Steel trolley, ideal for storing and transporting wood logs up to a length of 50 cm.

- Elegant wood handle makes moving easy
- Volume : L 42 x W 49 x H 80 cm
- Weight : 32 kg (*without wood*)
- Solid tyres



Log trolley
Without Logo (CHA000100)
Logo **AMR** (CHA000100A)

Individual laser cutting is possible from a minimum order quantity of 10 pieces (no extra costs)

